

**Proudly Made In America Since 1903**

# Hallowell<sup>®</sup>

# BSL

**Bulk Storage  
Lockers**



**Strong • Durable  
Secure • Built to Last**

*Quality is more than a tradition, it's a way of doing business.*



**Hallowell® Bulk Storage Lockers are the ideal solution for condos and any facility that requires additional secure storage capability.**

Hallowell® Bulk Storage Lockers are the most economical way to provide safe and secure storage in virtually any facility. Cost effectiveness and ease of installation make Bulk Storage Lockers the perfect choice when additional storage is needed. Choose from in-stock or custom sizes to fit your needs.

The use of Hallowell® Bulk Storage Lockers creates an esthetically appealing installation that when properly promoted can be a tremendous asset to the building and of great value to the users.

**RIGIDITY • STRENGTH • SAFETY • SECURITY**



Bulk Storage Lockers feature **SafeMesh84™**, the industry's strongest and safest expanded metal.

- ✓ 84% more steel than 3/4" mesh
- ✓ 84% more steel = more rigid unit
- ✓ 1/2" mesh keeps fingers out
- ✓ Reduces risk of loss, theft and content damage



**WE USE**  
1/2" Mesh  
16 Gauge Flattened Expanded Metal



**THEY USE**  
3/4" Mesh  
16 Gauge Flattened Expanded Metal

*Shown with optional expanded metal top*

*13" transom*

*Heavy-duty 2-knuckle lift off hinge*

*Welded door brace for added rigidity*

*Welded padlock hasp and ergonomic welded-on door pull*

*1/2" 16 gauge flattened expanded metal doors and sides*

*Heavy-gauge vertical frame channels and*

*Horizontal frame angles*



*Padlock hasp & Ergonomic one piece door pull is welded to the door frame.*



*Heavy-Duty 2-knuckle lift off hinges and door stops are welded to the frame for extra strength and security for a more finished and attractive appearance.*



*Optional 16 gauge 1/2" expanded metal top makes for security & rigidity for a higher level of protection from theft*

**Single Tier Starter Unit**



- Single & Double Tier Models
- Economical
- Secure
- Durable
- Fast & Easy Installation
- Low Life-Cycle Cost
- Attractive
- User Friendly




**STOCK SIZES SHIP WITHIN 5 BUSINESS DAYS FROM RECEIPT OF ORDER**

# Easy Custom Installations

Hallowell® Bulk Storage Lockers' unique construction provides for a simple, easy way of handling interference from overhead pipes and/or ducts.

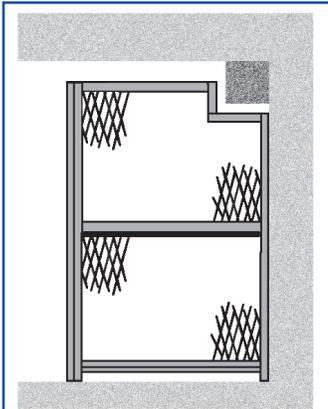

View of pipe through transom (or divider) with repair angle.



Repair Angles

Showing cut out (with repair angles) to allow for interfering duct.

Repair Angle 16 gauge 36" long repair angle is pre-punched on 2" centers to "heal" cuts in dividers or transom. Two bolts and clips are included with each angle.

**TOPS** are recommended for situations where the ceiling height is 8'-6" or more when using standard 7'-6" high component modules.

**SHELVES** are used as dividers between top and bottom openings of double tier lockers. May also be used in single tier lockers for additional floor space and may be shorter than depth of locker to provide space for long items.

**BACKS** are required for back-to-back installations or where a single row is set away from a wall.

**BOTTOMS** are recommended for use on all single or double tier lockers if dampness prevails.

Units available right-hand or left-hand hinged

- Single Tier: Overall Height 90"  
Opening Height: 75-1/2"
- Double Tier: Overall Height 90"  
Upper Opening Height: 31-1/2"  
Lower Opening Height: 42"

Blue denotes in stock sizes. Custom sizes are also available.

STARTER UNITS						ADDER UNITS			
W	D	H	Part No. (Right Hinged)	Part No. (Left Hinged)	Wt (lbs.)	Part No. (Right Hinged)	Part No. (Left Hinged)	Wt (lbs.)	
<b>SINGLE TIER</b>									
36	36	90	BSL363690-R-1S-HG	BSL363690-L-1S-HG	119	BSL363690-R-1A-HG	BSL363690-L-1A-HG	88	
36	48	90	BSL364890-R-1S-HG	BSL364890-L-1S-HG	133	BSL364890-R-1A-HG	BSL364890-L-1A-HG	98	
36	60	90	BSL366090-R-1S-HG	BSL366090-L-1S-HG	145	BSL366090-R-1A-HG	BSL366090-L-1A-HG	102	
48	36	90	BSL483690-R-1S-HG	BSL483690-L-1S-HG	129	BSL483690-R-1A-HG	BSL483690-L-1A-HG	98	
48	48	90	BSL484890-R-1S-HG	BSL484890-L-1S-HG	143	BSL484890-R-1A-HG	BSL484890-L-1A-HG	105	
48	60	90	BSL486090-R-1S-HG	BSL486090-L-1S-HG	157	BSL486090-R-1A-HG	BSL486090-L-1A-HG	112	
<b>DOUBLE TIER</b>									
36	36	45	BSL363690-R-2S-HG	BSL363690-L-2S-HG	127	BSL363690-R-2A-HG	BSL363690-L-2A-HG	105	
36	48	45	BSL364890-R-2S-HG	BSL364890-L-2S-HG	155	BSL364890-R-2A-HG	BSL364890-L-2A-HG	116	
36	60	45	BSL366090-R-2S-HG	BSL366090-L-2S-HG	178	BSL366090-R-2A-HG	BSL366090-L-2A-HG	127	
48	36	45	BSL483690-R-2S-HG	BSL483690-L-2S-HG	137	BSL483690-R-2A-HG	BSL483690-L-2A-HG	115	
48	48	45	BSL484890-R-2S-HG	BSL484890-L-2S-HG	165	BSL484890-R-2A-HG	BSL484890-L-2A-HG	126	
48	60	45	BSL486090-R-2S-HG	BSL486090-L-2S-HG	188	BSL486090-R-2A-HG	BSL486090-L-2A-HG	137	

## ACCESSORIES FOR BULK STORAGE LOCKERS

W	D	H	Part No.	Wt (lbs.)
<b>TOP PANELS</b>				
36	36		4803636HG	9
36	48		4803648HG	10
36	60		4803660HG	11
48	36		4804836HG	12
48	48		4804848HG	13
48	60		4804860HG	14
<b>FRONT EXTENSION PANELS</b>				
6		90	4600690HG	20
12		90	4601290HG	23
18		90	4601890HG	26
24		90	4602490HG	29
<b>BACK PANELS</b>				
36		90	4703690HG	30
48		90	4704890HG	38
<b>REPAIR ANGLES</b>				
36			20100	3

STORAGE LOCKER STOCK SIZES	
Standard Sizes available in single & Double tier configuration.	
Width	3'-0", 4'-0"
Depths	3'-0", 4'-0", 5'-0"
Height	7'-6"



**NEW STOCK COLOR**

**725 DARK GRAY (HG)**

**FOR MORE INFO GO TO HALLOWELL-LIST.COM**

**NOTE:** In the interest of safety, all lockers must be securely anchored to the floor and/or wall.

**STOCK SIZES SHIP WITHIN 5 BUSINESS DAYS FROM RECEIPT OF ORDER**





## SPECIFICATIONS

**General:** Lockers shall be Hallowell Bulk Storage Lockers with all welded components as manufactured by List Industries Inc., 2823 West Orange Avenue, Apopka, FL 32703, [www.Hallowell-List.com](http://www.Hallowell-List.com). Quantities, sizes and arrangements shall be as shown on drawings.

**Locker Fronts:** All doors, whether single or double tier, shall consist of 1/2" 16 gauge flattened expanded metal framed by 1-3/8" x 1" 12 gauge formed angles. Single tier doors shall have an angle reinforcement across center. Doors shall be pre-hung in frames at the factory, with all hinges, padlock hasps and door strikes securely welded in position. Door frames shall be fabricated from 1-1/2" x 1" 14 gauge formed channels on the sides and 1-1/2" x 1" formed angles at top and bottom and include a 13" transom. All frames shall be pre-punched for ease of installation. All front assemblies are 1-1/2" deep.

**Vertical Dividers:** Shall be 1/2" 16 gauge flattened expanded metal securely welded to 1-1/8" x 1-1/8" 14 gauge formed angles. Shelf support channels shall be fabricated of 14 gauge steel and be welded to vertical dividers (sides) on inside and outside of intermediate double tier dividers and on inside only of double tier row end dividers as well as on inside of all single tier dividers. All vertical dividers are 1-1/2" less than nominal locker depth to allow for 1-1/2" deep door front assembly.

**Repair Angles:** 16 gauge 36" long repair angle is pre-punched on 2" centers to "heal" cuts in dividers or transom. Two bolts and clips are included with each angle.

**Shelves:** Where required, shall be of 22 gauge galvanized sheet steel with double bends at front and back. Provided as standard for all double tier lockers to separate upper tier from lower tier. Provided in all multiple 12" (nominal) deep Planks to meet locker depth. Galvanized shelves ship unpainted.

**Backs:** Optional, shall be of 1/2" 16 gauge flattened expanded metal frame-less design. Required at back-to-back conditions or where locker backs are away from walls.

**Bottoms (optional):** Where required, shall be of 22 gauge galvanized sheet steel with double bend at front and back. Galvanized bottoms ship unpainted.

**Tops (optional):** Shall be of 1/2" 16 gauge flattened expanded metal with a 16 gauge angle welded at rear. Provide mounting clips and bolts. Recommended where ceiling height is 12" or more above locker height.

**Finish:** All fronts, vertical dividers, backs and tops shall have one coat of Dark Gray powder coat finish. Bottoms and shelves shall be galvanized sheet steel, unpainted.

**Installation:** Vertical dividers and door frames shall be securely anchored to wall and/or floor with an anchoring system selected by the installer. All door frames, tops and backs shall be fastened together using 1/4" x 3/4" cadmium Plated bolts and nuts, to be provided by installer.

*All steel storage lockers  
are designed to provide maximum  
security and durability.*

**Call Today For a Prompt  
Professional Storage Assessment  
866-566-0500**

**E-mail: [info@hallowell-list.com](mailto:info@hallowell-list.com)  
[www.Hallowell-List.com](http://www.Hallowell-List.com)**

2823 W. Orange Ave. P.O. Box 1267 Apopka, FL 32703