PREMIUM KD SIXTEEN PERSON LOCKER (PRODUCT No. SK _ _ _ _ _ _ -16)

ELEVATION ' '

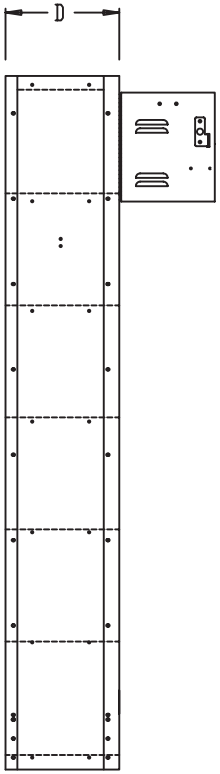

SIDE VIEW

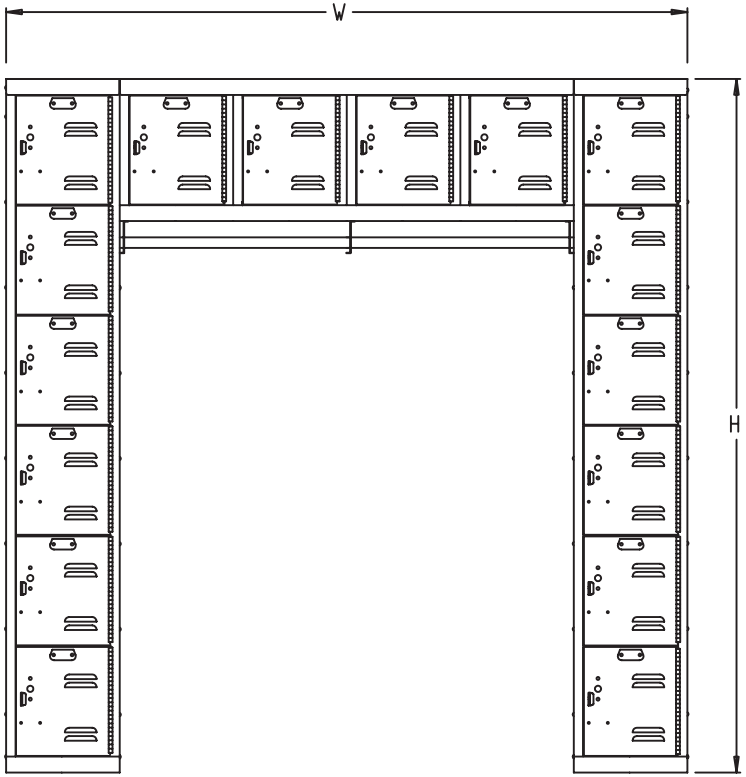

FRONT VIEW

LOCKER DETAILS:

DOOR & FRAME COLOR =
BODY COMPONENTS COLOR =729 PARCHMENT
TOP =
HANDLE = FRICTION CATCH FINGER PULL
DOOR VENTILATION = 3" LOUVERS
SIDE VENTILATION = SOLID
BASE =
LOCKS =
HINGE = FULL LENGTH, STAKED PIANO HINGE WELDED TO DOOR & RIVETED TO THE FRAME

CONTRACTOR NOTE

ALL CONCRETE BASES SHOULD BE LEVEL AND TROWELED SMOOTH TO ASSURE PROPER INSTALLATION OF THE LOCKERS. ALL FLOORING MATERIAL ATTACHED TO THE FACE OF THE BASE SHOULD BE RECESSED AT LEAST 1/4" FROM THE TOP EDGE OF THE BASE. LOCKERS MUST BE ANCHORED TO WALL.

GAUGES

DOOR = 18 GA., C.R.S.
FRAME = 16 GA., C.R.S
TOP = 24 GA., C.R.S.
BOTTOM = 24 GA., C.R.S.
SHELVES = 24 GA., C.R.S.
SIDES = 24 GA., C.R.S.
BACKS = 24 GA., C.R.S.
COAT ROD = 7/8" DIA. 14 GA., E.R.W. PLATED TUBE

LATCHING: (BOX DOOR) SINGLE POINT FRICTION CATCH WITH DOOR PULL. DOOR WILL ACCEPT BUILT-IN LOCK OR PADLOCK.

Hallowell®

THIS DRAWING AND THE INFORMATION ON IT IS THE CONFIDENTIAL PROPERTY OF LIST INDUSTRIES, INC. AND SHALL NOT BE COPIED OR DISCLOSED TO OTHERS WITHOUT WRITTEN PERMISSION. ONLY LIST INDUSTRIES RESERVES THE RIGHT TO ALTER ANY DESIGN. ANY UNAUTHORIZED MODIFICATIONS RELEASES LIST INDUSTRIES FROM ALL LIABILITIES.

TOLERANCES UNLESS SPECIFIED:
FRACTIONS: ±1/32 DECIMALS: ±.010 DEGREES: ±1°

Customer: CUSTOMER	Drawn By: DRAFTER	Checked By:	Date: DATE	Scale: NONE
Customer Order Number: PO#	Acad Number: PAGE NUMBER		Sheet # Of #	Revision:
Description: JOB NAME JOB LOCATION	Drawing Number: FOLDER NUMBER			

SK-16 11-21-12