Hallowell

PREMIUM KD

ELEVATION ' '

DISCLOSED TO OTHERS WITHOUT WRITTEN PERMISSION, ONLY LIST INDUSTRIES RESERVES THE RIGHT TO ALTER ANY DESIGN, ANY UNAUTHORIZED MODIFICATIONS RELEASES LIST INDUSTRIES FROM ALL LIABILITIES. TOLERANCES UNLESS SPECIFIED FRACTIONS: ±1/32 DECIMALS: ±.010

Customer Order Number: PO# Description: JOB NAME DATE

Customer: CUSTOMER

Drawn By: DRAFTER Checked By:

NONE Revision:

THIS DRAWING AND THE INFORMATION ON IT IS THE CONFIDENTIAL


PROPERTY OF LIST INDUSTRIES, INC. AND SHALL NOT BE COPIED OR


DUPLEX LOCKER (15" TO 18" WIDE) (PRODUCT No. SK_ _ _ _ _ _ DU_)

Acad Number: PAGE NUMBER Drawing Number:

Sheet # Of #

SIDE VIEW

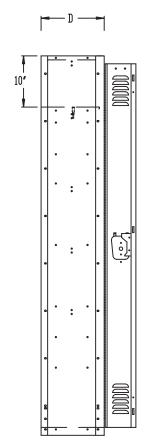

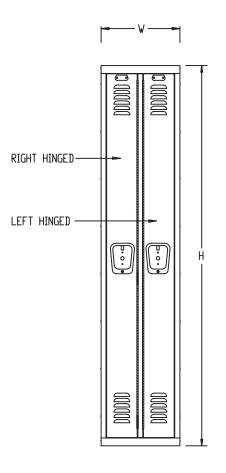

TTP = HANDLE = LIFT (S.S. DRAWN RECESSED)

BODY COMPONENT COLOR = 729 PARCHMENT

LOCKER DETAILS:

DOOR VENTILATION = 3" LOUVERS SIDE VENTILATION = SOLID

DOOR & FRAME COLOR =

BASE = LOCKS =

HINGE = CONTINUOUS PIANO HINGE

CONTRACTOR NOTE

ALL CONCRETE BASES SHOULD BE LEVEL AND TROWELED SMOOTH TO ASSURE PROPER INSTALLATION OF THE LOCKERS. ALL FLOORING MATERIAL ATTACHED TO THE FACE OF THE BASE SHOULD BE RECESSED AT LEAST 1/4' FROM THE TOP EDGE THE BASE. LITCKERS MUST BE ANCHORED TO WALL.

GAUGES

18 GA., C.R.S. DOOR = FRAME = 16 GA., C.R.S TOP = 24 GA., C.R.S. BOTTOM = 24 GA., C.R.S. SHELVES = 24 GA., C.R.S. SIDES = 24 GA., C.R.S. BACKS = 24 GA., C.R.S.

LATCHING: (WARDROBE) THREE POINT RECESSED ON LOCKER DOORS 48" AND OVER, TWO POINT RECESSED ON ON LOCKER DOORS 36" TO 20". AUTOMATIC LOCKING DEVICE WITH LIFT-TYPE PADLOCK HASP.

FRONT VIEW

DEGREES: ±1°

JOB LOCATION

FOLDER NUMBER

SK-DU 11-21-12